



Loops	Circumference length	Number of windings		
KAS 1	6 m	3	75	+/-20 %
KAS 2	12 m	3	140	+/-20 %
KAS 3	21 m	3	250	+/-20 %
RS (frame loop)	6 m (1 m x 2 m)	3	75	+/-20 %


Other dimensions are available on request.

The induction loops are usually installed in a square or rectangular shape. The installation in asphalt or concrete ground requires a saw slot with following geometric dimensions:
Depth: approx. (35 – 50) mm, Width: approx. (8 – 9) mm.

Different values of inductivity are obtained, depending on circumference and shape of the loop. Inductances of the loops given above are within the optimal range of operation (60 – 300) μH for Weiss-Electronic detectors. Within this range, the highest sensitivity is obtained.

The length of the loop feed cable may be reduced!

Laying (KAS loops)

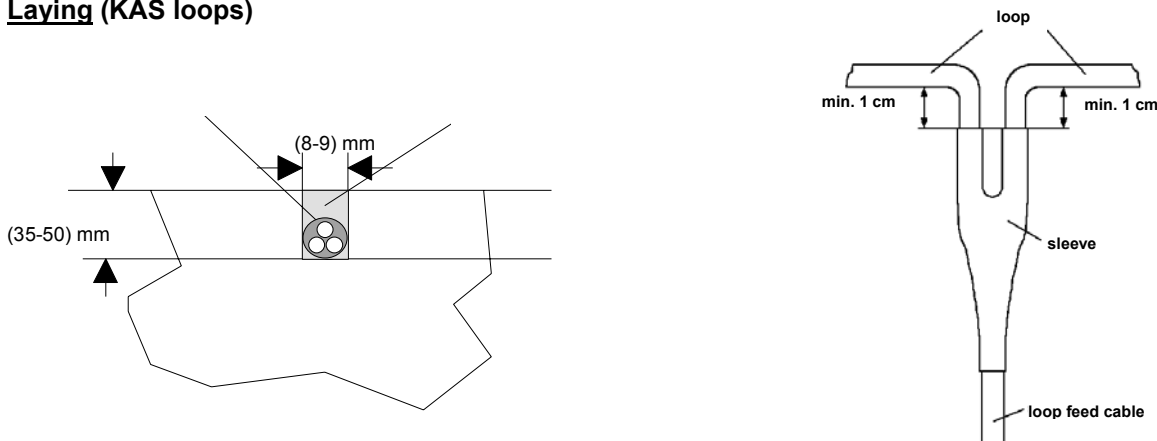

Please note before sealing:

- Saw slot has to be dry and free of dust.
- Loop wire must be completely at the bottom of the saw slot. Wedges of wood or silicone may be used to fix the loop wire.
- Fill saw cut cleanly; use only as much sealant as needed to fill the slot.
- Let the sealant cure.
- The loop must not be able to move in the slot or in the duct, the position of the loop must not be changed.
- A change of the loop position may be caused by:
 - Crossing of heavy vehicles (lorries, tanks...)
 - Swinging bridges
 - Different materials, in which the loop is laid in, e.g. one-third of the loop laying in concrete, two-thirds in black top.


We recommend the Weiss-Electronic "Two-component cold-sealant" based on artificial resin. After installation it remains permanently elastic even in low temperatures.

Heavy iron reinforcement

Iron reinforcements in the ground reduce the sensitivity of inductance loops. The lesser the distance between loop and the reinforcement, the lesser the sensitivity. Tracks, girders, grating or steel constructions must be regarded as such reinforcements. If possible, avoid iron reinforcements in the planning-phase or lay loops lower.

Special areas of application (RS - loop)**Loop installation under paving**

Loops are laid in the sandstone layer between the lower gravel layer and the pavers.

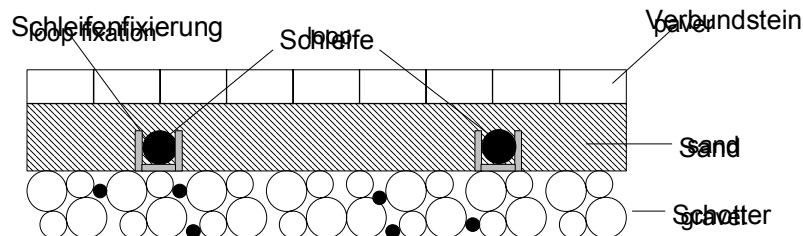**Note:**

One way to fixate a loop is by laying it in a cable duct. The cable duct must be completely sealed with a suitable sealant after inserting the loop wire (application-specific product by Weiss-Electronic).



- Spread bedding sand and compact
- Lay pavers and compact
- Measure insulation resistance
- Check functionality

For checking the loop values, Weiss-Electronic offers the loop diagnosis instrument SDG2000, also on loan.

Weiss-Electronic will install the induction loop at your facility upon request. We would be pleased to advise you personally on this.